


999.00 EUR

incl. 19% VAT, plus [shipping](#)

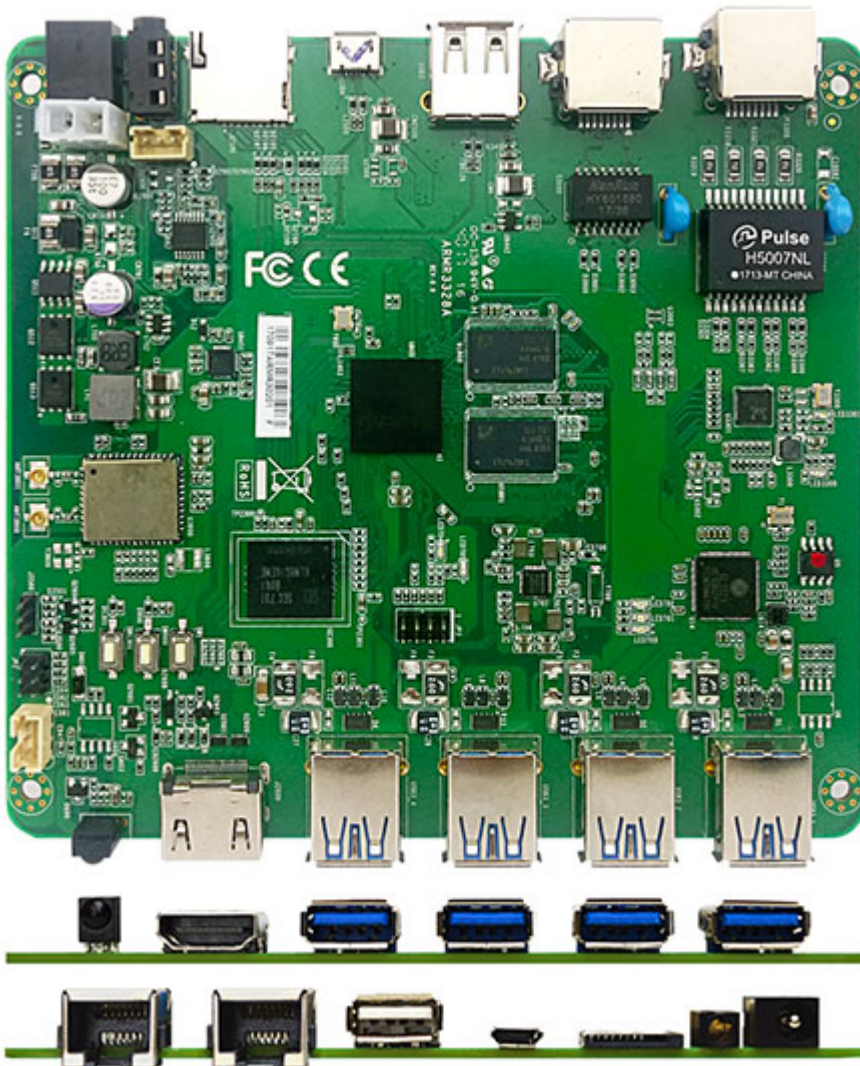

Support:  [Jetway ARM Overview](#)

- Rock chip® ARM Cortex A53 RK3328 Quad-core 1.5GHz
- Onboard 1333/2GB DDR3L DRAM up to 4GB
- Onboard 8G Flash ROM up to 32GB
- Support 1 * Micro SD Socket (Max 64G)
- 1 * REALTEK Gigabit LAN external PHY, 4 * USB3.0, 1 * USB2.0, 1 * OTG, 1 * HDMI
- Support 4K VP9 and 4K 10bit H265/H264 video decoding up to 60fp
- Support 1080P H.264 / H.265format video encoding
- Supported with HDR10 and HLG modes
- Support Android 7.1, Linux 4.4
- 130mm * 120mm

Model / Part Number	
Model	– JARM3328A-2N
Part Number	– JARM3328A-2N
Form Factor	
Dimensions	– 130 * 120mm
Processor System	
CPU	– Rock chip® ARM Cortex A53 RK3328 1.5GHz
Core Number	– Quad-core
Max Speed	– 1.5G

L2 Cache	– 0
Chipset	– Rock chip® ARM Cortex A53 RK3328 SOC
BIOS	– 0
PMU	– Rock chip® RK805-1
Expansion Slot	
Mini-PCle	– 0
TF Card Socket	– 1
SIM Card Holder	– 0
Memory	
Technology	– Onboard DDR3L 1333MHz2GB
Max.	– 4GB
Flash Rom	– 8GB (Max 32GB)
Graphics	
Controller	– (by CPU)
VRAM	– Shared Memory
LVDS	– 0
HDMI	– 1 (2.0)
MIPI	– 0
DisplayPort	– 0
MultiDisplay	– Single Display
Ethernet	
Ethernet	– 10/100/1000 Mbps; 10/100 Mbps
Controller	– 1 * Realtek RTL8211F-CG Gigabit LAN – 1 * 10/100 Mbps internal FE PHY
Connector	– 2 * RJ 45
Audio	
CODEC	– HD Audio: SGM89000
Channel	– 2 Channels
Special Features	
WIFI	– 802.11 a/b/g/n/ac,5.0G
WIFI Chip	– RTL8822BS
Bluetooth	– BT-V4.1 SDIO BLE
OS	– Android 7.1, Linux 4.4
Rear I/O	
HDMI	– 1 (3840 x 2160@60Hz)
Ethernet	– 0
USB	– 4 (4* UB3.0)
IR	– 1
Audio	– 1 (Line-out +MIC)
Front I/O	
Audio	– 1 (Line-out +MIC)
USB	– 6 (4* UB3.0 + 1* USB2.0 + 1 * OTG)
Ethernet	– 2
TF Card Socket	– 1
DC-input	– 1

Power Requirements

Input PWR	– 5 ~ 12V DC-in (PWR Con)
Power On	AT/ATX Supported – AT : Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready

Certifications

Certifications	– RoHS, REACH, CE, FCC (Option)
----------------	---------------------------------

Environment

Temperature	– Operating: -10°C ~ 60°C
	– Storage: -20°C ~ 65°C

Warranty

Warranty	– 2 Years Limited Warranty
----------	----------------------------