

AIMB-258

Intel® Core™ 2 Duo Mini-ITX with
VGA/DVI/LVDS, 6 COM, and Dual LAN

NEW



Features


- Supports Intel® uFC-PGA 478 Core™ 2 Duo mobile processor and max. 4 GB dual channel DDR3 800/1066 MHz SDRAM
- Intel® GM45 and ICH9M supports FSB 667/800/1066 MHz
- Supports DirectX10, OpenGL 2.0
- Supports dual display for VGA, LVDS, and DVI
- PCIe x16 expansion for add-on cards
- Rich I/O connectivity of 6 serial ports, 8 USB, 16-bit GPIO
- Dual Gigabit Ethernet
- Supports iTPM 1.2



Specifications

Processor System	CPU (45 nm uFC-PGA 478)	Intel Core 2 Duo	Intel Celeron M			
	Max. Speed	T9400 2.53 GHz	575 2.0 GHz			
	Front Side Bus	667/800/1066 MHz	667			
	L2 Cache	6 MB	1 MB			
	Chipset	GM45 + ICH9M				
	BIOS	Award 16 Mbit, SPI				
Expansion Slot	PCI	-				
	Mini-PCI	-				
	PCIe x16	4 GB/s per direction, 1 slot (if PCIe x16 is used, DVI is automatically disabled)				
Memory	Technology	DDR3 800/1066 MHz SDRAM				
	Max. Capacity	4 GB				
	Socket	2 x 204-pin SODIMM				
Graphics	Controller	Intel GM45 GMCH integrated Graphics Media Accelerator X4500				
	VRAM	Shared system memory up to 384 MB video memory				
	LVDS	Single channel 18/24-bit/Dual channel 36/48-bit LVDS				
	TV-Out	-				
	DVI	Yes (if DVI is used, PCIe x16 is automatically disabled)				
	Dual Display	CRT + DVI; CRT + LVDS; DVI + LVDS				
Ethernet	Interface	10/100/1000 Mbps				
	Controller	GbE LAN1: Realtek RTL8111C; GbE LAN2: Realtek RTL8111C				
	Connector	RJ-45 x 2				
SATA	Max Data Transfer Rate	300 MB/s				
	Channel	2				
SSD	CompactFlash	Supports CompactFlash Type I/II				
Rear I/O	VGA	1				
	DVI	1				
	Ethernet	2				
	USB	4 (USB 2.0 compliant)				
	Audio	3 (Mic-in, Line-in, Line-out)				
	Serial	2 (1 of RS-232, 1 of RS-232/422/485)				
	PS/2	2 (1 x keyboard and 1 x mouse)				
	LVDS	1				
Internal Connector	USB	4 (USB 2.0 compliant)				
	Serial	4 (RS-232)				
	IDE	-				
	SATA	2				
	CompactFlash	1				
	Parallel	-				
	IrDA	-				
	FDD	-				
	DIO	16-bit General Purpose I/O for DI and DO				
	Watchdog Timer	Output	System reset			
Interval		Programmable 1 ~ 255 sec/min				
Power Requirement	Power On	5 V	3.3 V	12 V	5 Vsb	-12 V
		0.99 A	2.67 A	2.07 A	0.17 A	0.08 A
Environment	Operating	Non-Operating				
	Temperature	0 ~ 60° C (32 ~ 140° F)		-20 ~ 70° C (-4 ~ 158° F)		
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")				

Board Diagram

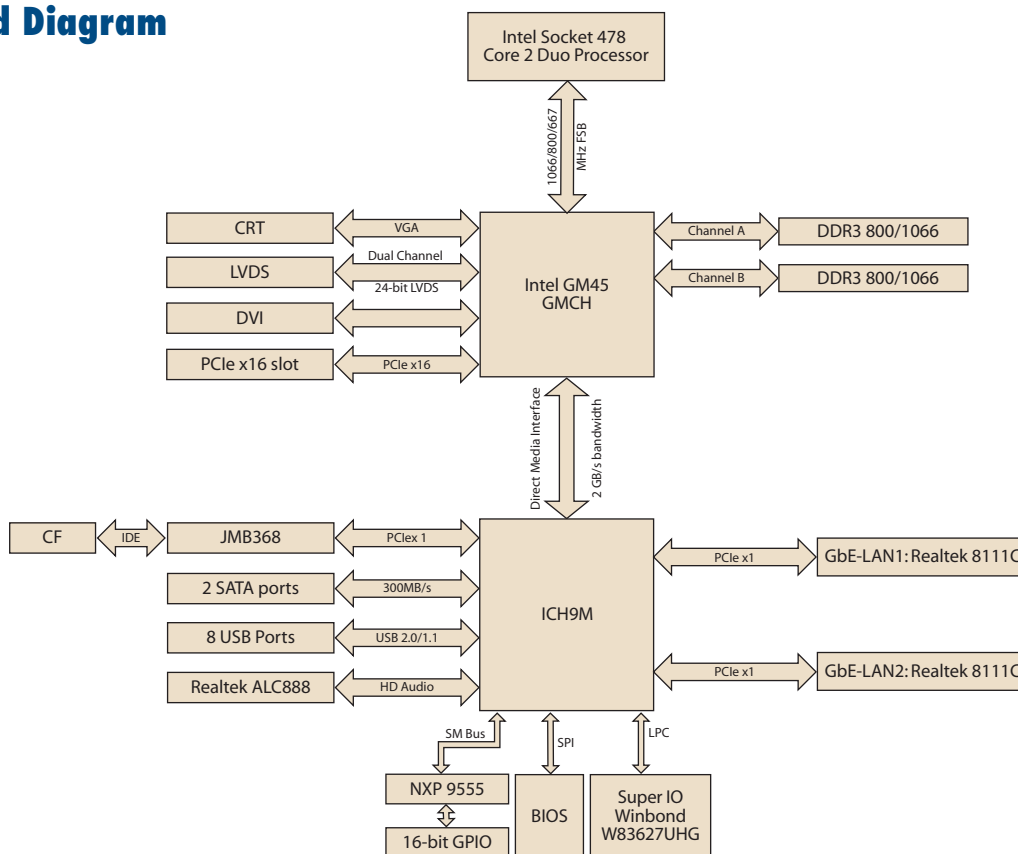

Ordering Information

	Display	GbE	SATA	Serial	CF
AIMB-258G2-00A1E	VGA/DVI/ LVDS	Dual	2	6	1

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI slot expansion

Bracket View



AIMB-258G2-00A1E

Packing List

Description	Quantity
AIMB-258 SBC	x 1
SATA HDD data cable	x 2
SATA HDD power cable	x 2
CPU cooler	x 1
I/O port bracket	x 1
Startup manual	x 1
Driver CD	x 1
Cable kits for 4 serial ports	x 1

Accessories

Part Number	Description
1700003195	USB cable with four ports, 17.5 cm
1700002204	USB cable with four ports, 27 cm
1700002314	USB cable with four ports, 30.5 cm